



# Osaka 3 LXQ

Semi vertical glass doors · Remote



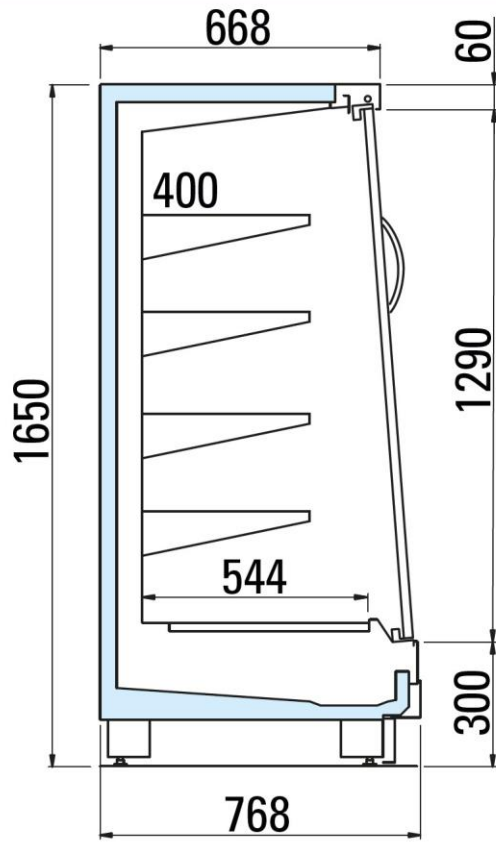

**75 H165**

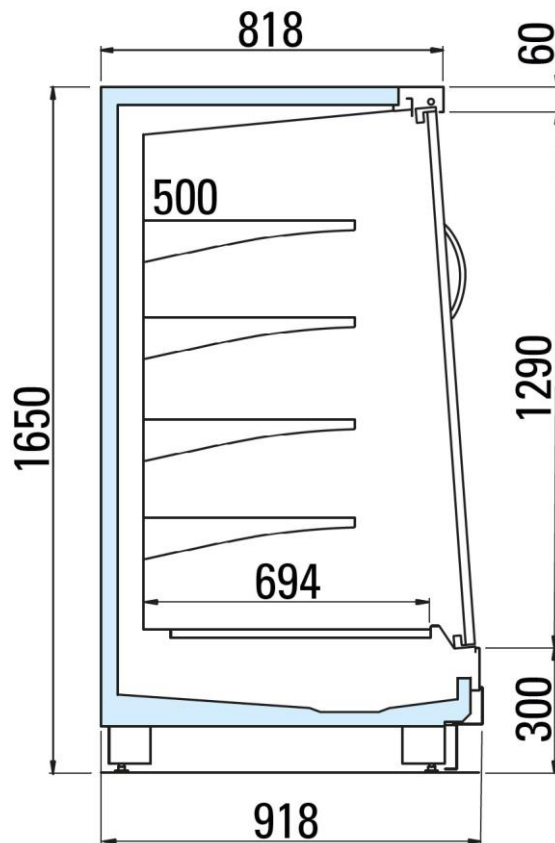

**90 H165**

| Osaka 3 LXQ         |            | Cabinet   |           |           |           | HC        |           |           |
|---------------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Length without ends | mm         | 1250      | 1875      | 2500      | 3750      | -         | -         | -         |
| Length with ends    | mm         | 1330      | 1955      | 2580      | 3830      | 1600      | 1975      | 2183      |
| Height              | mm         | 1650      | 1650      | 1650      | 1650      | 1650      | 1650      | 1650      |
| Depth               | mm         | 768   918 | 768   918 | 768   918 | 768   918 | 768   918 | 768   918 | 768   918 |
| Working Temperature | -1/+1 °C   | •         | •         | •         | •         | •         | •         | •         |
|                     | 0/+2 °C    | •         | •         | •         | •         | •         | •         | •         |
|                     | +2 / +4 °C | •         | •         | •         | •         | •         | •         | •         |

Information related to energy class (Ecodesign Regulation 2019/2024 and Energy Labelling Regulation 2019/2018) refers to specific product configurations. All configurations other than that presented in the website could require significantly different energy class information. For further details, either consult the European Product Database for Energy Labelling (EPREL) or contact our sales office.

