


# Osaka 3 PVLX

Semi vertical · Single pane doors · Remote


---



# H150

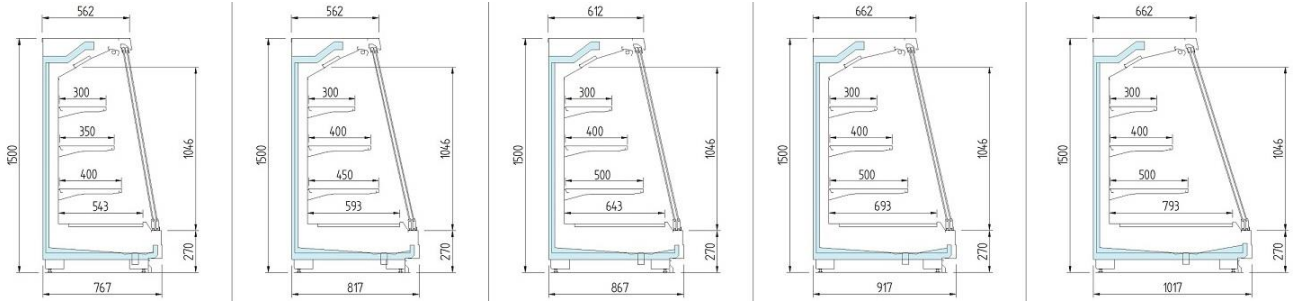

# H165

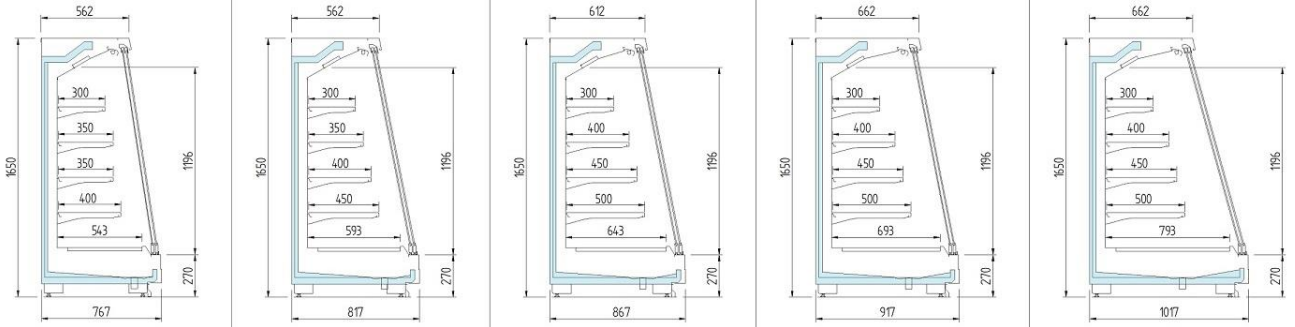

Osaka 3 PVLX (Cabinet)					
<b>Length without ends</b>	<b>mm</b>	<b>1250</b>	<b>1875</b>	<b>2500</b>	<b>3750</b>
<b>Height</b>	<b>cm</b>	<b>150   165</b>	<b>150   165</b>	<b>150   165</b>	<b>150   165</b>
<b>Depth</b>	<b>cm</b>	<b>75   80   85   90   100</b>	<b>75   80   85   90   100</b>	<b>75   80   85   90   100</b>	<b>75   80   85   90   100</b>
<b>Working Temperature</b>	-1 / +1	•	•	•	•
	0 / +2	•	•	•	•
	+2 / +4	•	•	•	•

Osaka 3 PVLX (Headcase)						
<b>Length with ends</b>	<b>mm</b>	<b>1600</b>	<b>1775</b>	<b>1975</b>	<b>2183</b>	<b>2600</b>
<b>Height</b>	<b>cm</b>	<b>150   165</b>	<b>150   165</b>	<b>150   165</b>	<b>150   165</b>	<b>150   165</b>
<b>Depth</b>	<b>cm</b>	<b>75   90</b>	<b>75   90</b>	<b>75   90</b>	<b>75   90</b>	<b>75   90</b>
<b>Working Temperature</b>	-1 / +1	•	•	•	•	•
	0 / +2	•	•	•	•	•
	+2 / +4	•	•	•	•	•

Information related to energy class (Ecodesign Regulation 2019/2024 and Energy Labelling Regulation 2019/2018) refers to specific product configurations. All configurations other than that presented in the website could require significantly different energy class information. For further details, either consult the European Product Database for Energy Labelling (EPREL) or contact our sales office.

