

# OSAKA 3 LX

VERTICAL GLASS-DOOR & SEMI-VERTICAL GLASS-DOOR • REMOTE REFRIGERATION UNIT



**arneg**

ITALIA


YOUR GLOBAL PARTNER FOR RETAIL SOLUTIONS

**OSAKA 3 LX VRT-C-1 TN V LINEARE R**


Length without side panels	mm	1250		1875		2500		3750	
Height	cm	203	216	203	216	203	216	203	216
Temperature class	3 M0	•	•	•	•	•	•	•	•
	3 M1	•	•	•	•	•	•	•	•
	3 M2	•	•	•	•	•	•	•	•
Preservation temperature	-1/+1	•	•	•	•	•	•	•	•
	0/+2	•	•	•	•	•	•	•	•
	+2/+4	•	•	•	•	•	•	•	•
Horizontal display area*	m <sup>2</sup>	Depth	65	2,56	3,83	5,11	7,67		
			70	2,87	4,3	5,74	8,6		
			75	3,18	4,77	6,36	9,54		
			80	3,24	4,86	6,49	9,73		
			85	3,31	4,96	6,61	9,92		
			90	3,37	5,05	6,74	10,1		
			100	3,49	5,24	6,99	10,48		
Energy class**	Depth	65 - 70	AG <b>B</b>	AG <b>B</b>	AG <b>B</b>	AG <b>B</b>			
		- 75 - 80							
		- 85 - 90 -							
		100							

\*Value referred to illustrated configurations.


\*\*The energy class may vary depending on the product configuration.

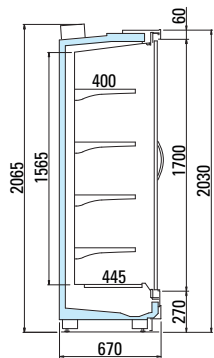


**65 H203**

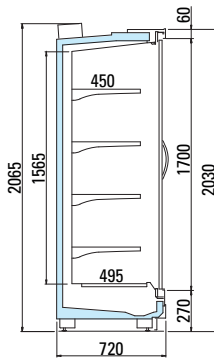


**70 H203**

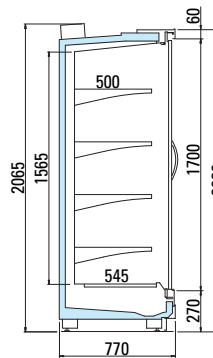


**75 H203**

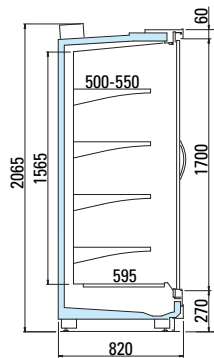


**80 H203**

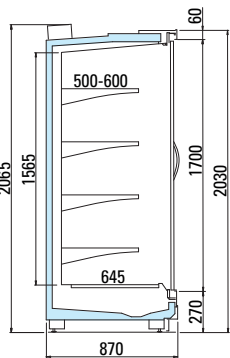


**85 H203**

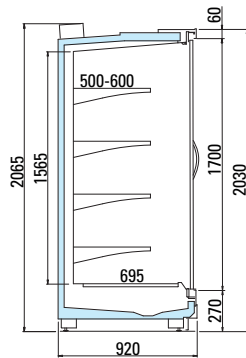


**90 H203**

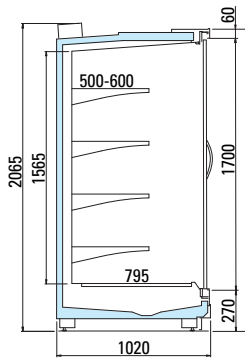


**100 H203**

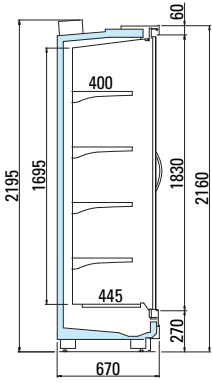


65 H216

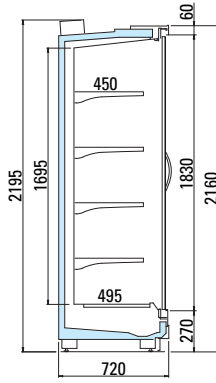


70 H216

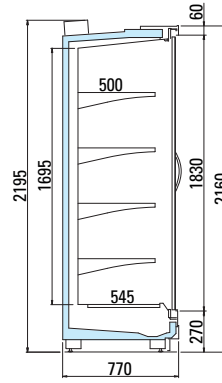


75 H216

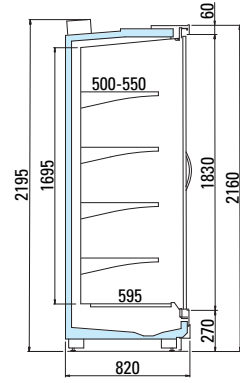


80 H216

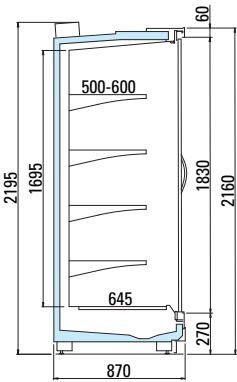

85 H216

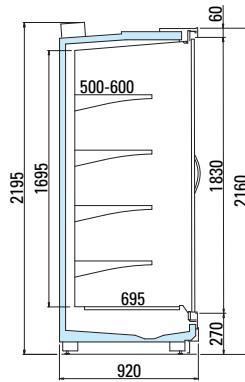

90 H216

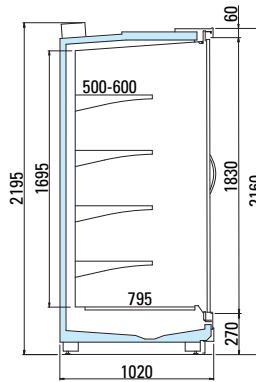


100 H216

OSAKA 3 LX VRT-C-1 TN V TESTATA R


Overall length	mm	1350	1433		1600	1774		1975		2183		
Height	cm	216	203	216	216	203	216	203	216	216		
Temperature class	3 M0	•	•	•	•	•	•	•	•	•		
	3 M1	•	•	•	•	•	•	•	•	•		
	3 M2	•	•	•	•	•	•	•	•	•		
Preservation temperature	°C											
	-1/+1	•	•	•	•	•	•	•	•	•		
	0/+2	•	•	•	•	•	•	•	•	•		
	+2/+4	•	•	•	•	•	•	•	•	•		
Horizontal display area*	m <sup>2</sup>	Depth	75	3,18	3,39		3,81	-	4,25	4,76		5,3
			90	-	-		-	4,51		5,05		-
Energy class**	Depth	75					-					
		90	-	-		-					-	

\*Value referred to illustrated configurations.


\*\*The energy class may vary depending on the product configuration.

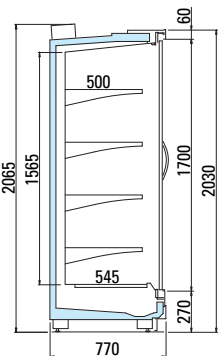


75 H203

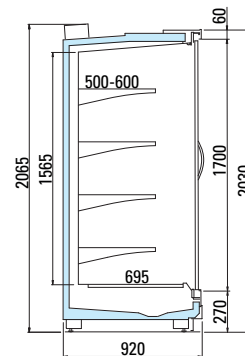

90 H203

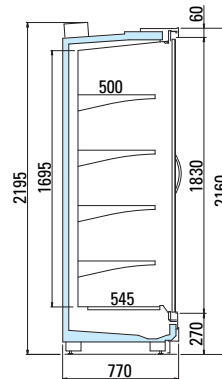

75 H216

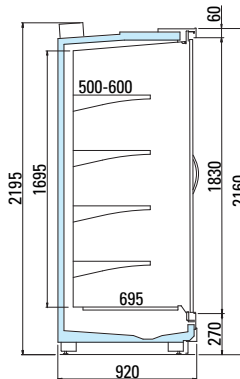


90 H216

**OSAKA 3 LX SVTQ-C-1 TNV LINEARE R**


Length without side panels	mm	1250		1875		2500		3750			
Height	cm	150	165	150	165	150	165	150	165		
Temperature class	3 M0	•	•	•	•	•	•	•	•		
	3 M1	•	•	•	•	•	•	•	•		
	3 M2	•	•	•	•	•	•	•	•		
Preservation temperature	°C	-1/+1	•	•	•	•	•	•	•		
	0/+2	•	•	•	•	•	•	•	•		
	+2/+4	•	•	•	•	•	•	•	•		
Horizontal display area*	m <sup>2</sup>	Depth	75	2,37	-	3,55	-	4,74	-	7,1	-
			85	2,68	-	4,02	-	5,36	-	8,04	-
			100	-	2,87	-	4,3	-	5,74	-	8,6
Energy class**	Depth	75-85	A G D	-	A G D	-	A G D	-	A G D	-	
		100	-	A G D	-	A G D	-	A G D	-	A G D	

\*Value referred to illustrated configurations.


\*\*The energy class may vary depending on the product configuration.




**65 H150**




**70 H150**




**75 H150**




**80 H150**




**85 H150**




**90 H150**




**100 H150**




**65 H165**




**70 H165**




**75 H165**




**80 H165**



85 H165



90 H165




100 H165

**OSAKA 3 LX SVTQ-C-1 TN V TESTATA R**

Overall length	mm	1774	1975	2183
Height	cm	150	150	150
Temperature class	3 M0	•	•	•
	3 M1	•	•	•
	3 M2	•	•	•
Preservation temperature	°C	•	•	•
	-1/+1	•	•	•
	0/+2	•	•	•
		•	•	•
Horizontal display area*	m <sup>2</sup>	3,17	3,55	3,95
Energy class**				

\*Value referred to illustrated configurations.

\*\*The energy class may vary depending on the product configuration.



75 H150