

PANAMA 3 LX

VERTICAL MULTI-DECK • REMOTE REFRIGERATION UNIT



31/01/2023 content modifiable without notice.

arneg

ITALIA


YOUR GLOBAL PARTNER FOR RETAIL SOLUTIONS


PANAMA 3 LX VRT-A-1 TN V LINEARE R

Length without side panels	mm	1250		1875		2500		3750	
Height	cm	203	216	203	216	203	216	203	216
Temperature class	3 M1	•	-	•	-	•	-	•	-
	3 M2	•	•	•	•	•	•	•	•
	3 H1	•	•	•	•	•	•	•	•
Preservation temperature	0/+2	•	-	•	-	•	-	•	-
	+2/+4	•	•	•	•	•	•	•	•
	+4/+6	•	•	•	•	•	•	•	•
Horizontal display area*	m ²	Depth	65	2,31	3,46	4,61	6,92		
			70	2,62	3,93	5,24	7,85		
			75	2,93	4,4	5,86	8,79		
			80	3,24	4,86	6,49	9,73		
			85	3,31	4,96	6,61	9,92		
			90	3,37	5,05	6,74	10,1		
			100	3,49	5,24	6,99	10,48		
Energy class**	Depth	65 - 70	E	E	E	E			
		- 75 - 80							
		- 85 - 90 -							
		100							


*Value referred to illustrated configurations.

**The energy class may vary depending on the product configuration.

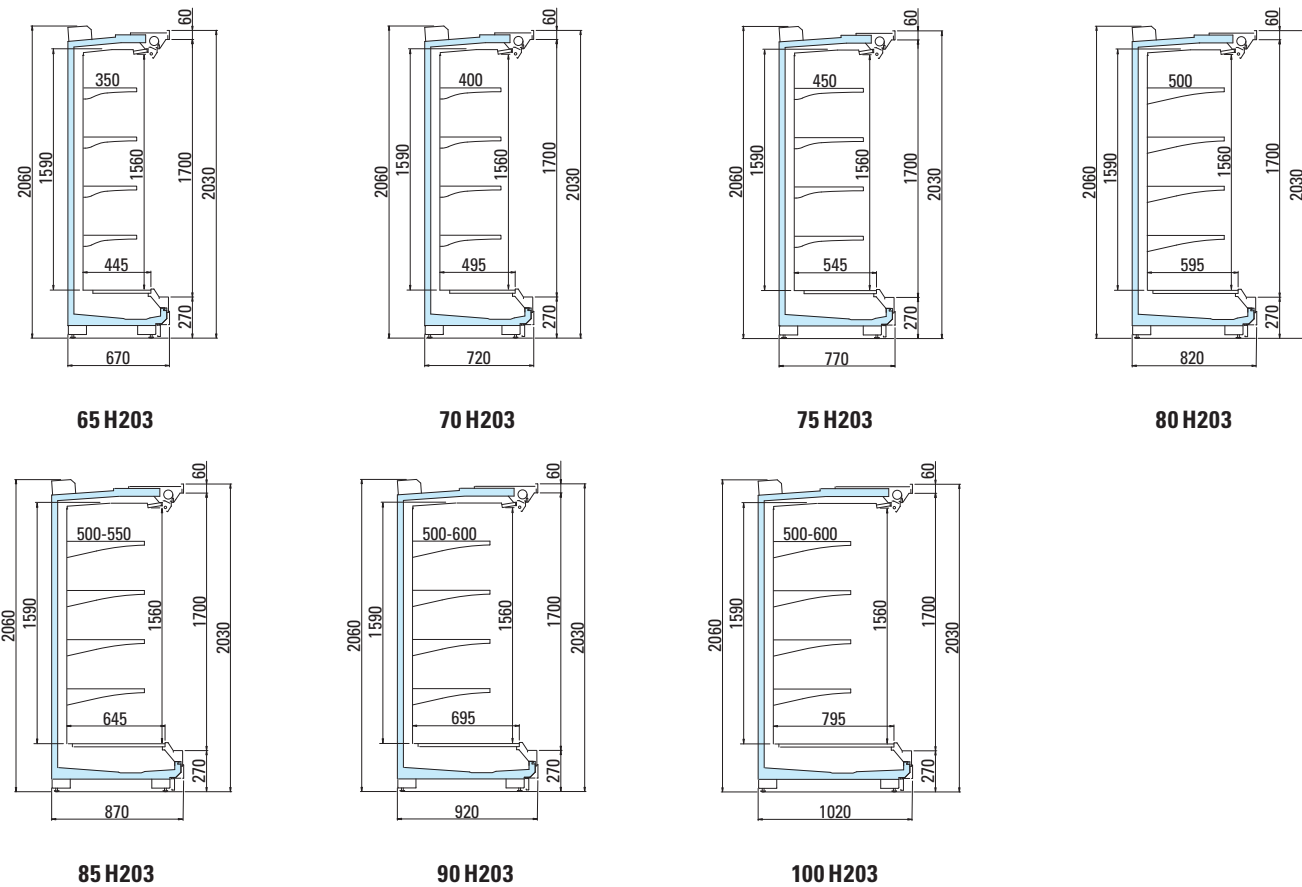


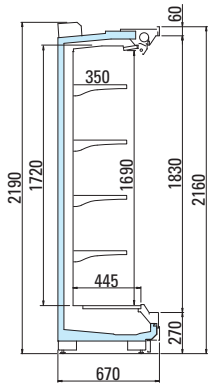


65 H216

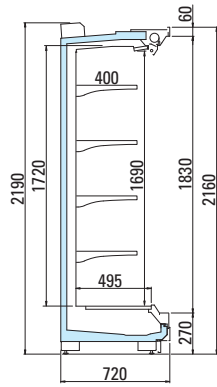


70 H216

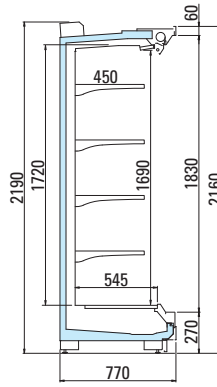


75 H216

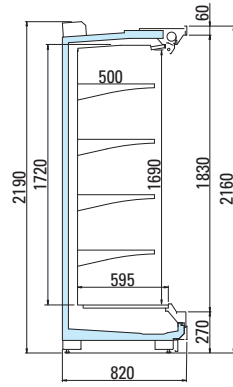


80 H216

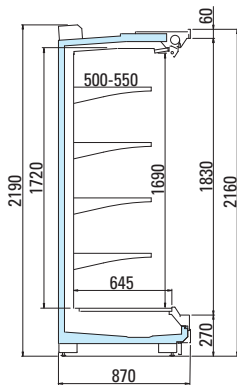

85 H216

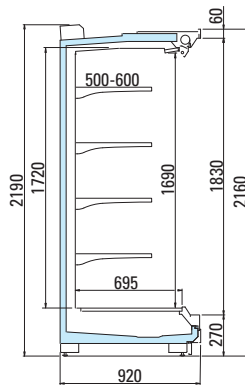

90 H216

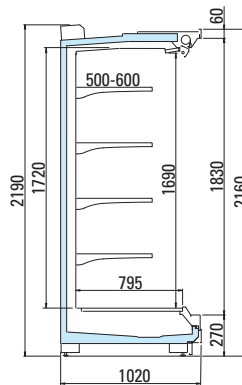


100 H216

PANAMA 3 LX VRT-A-1 TN V TESTATA R


Length without side panels	mm	1350	1433	1600	1774		1975	2183
Height	cm	203	203	203	203	216	203	203
Temperature class	3 M2	•	•	•	•	•	•	•
	3 H1	•	•	•	•	•	•	•
Preservation temperature	°C							
	+2/+4	•	•	•	•	•	•	•
	+4/+6	•	•	•	•	•	•	•
Horizontal display area*	m ²	2,93	3,12	3,52	3,92		4,4	4,88
Energy class**								

*Value referred to illustrated configurations.

**The energy class may vary depending on the product configuration.

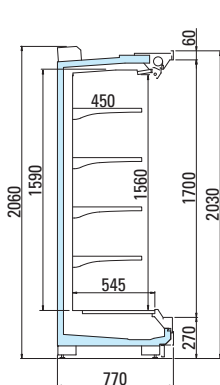

75 H203

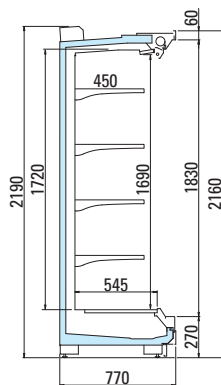


75 H216

PANAMA 3 LX VRT-A-1 TN V LINEARE R GL


Overall length	mm	1250		1875		2500		3125	3750		
Height	cm	203	216	203	216	203	216	216	203	216	
Temperature class	3 M1	•	•	•	•	•	•	•	•	•	
	3 M2	•	•	•	•	•	•	•	•	•	
Preservation temperature	0/+2	•	•	•	•	•	•	•	•	•	
	+2/+4	•	•	•	•	•	•	•	•	•	
Horizontal display area*	m ²	Depth	70	2.37	3.55	4.74	-	7.1			
			75	2.68	4.02	5.36	-	8.04			
			80	2.99	4.49	5.99	-	8.98			
			85	3.31	4.96	6.61	-	9.92			
			90	-	3.37	-	5.05	-	6.74	8.42	10.1
			100	3.49	5.24	6.99	-	10.48			
Energy class**	Depth	70 - 75 -80 - 85 -100	E		E		E		E		
		90	-	E		-	E		E		

*Value referred to illustrated configurations.


**The energy class may vary depending on the product configuration.

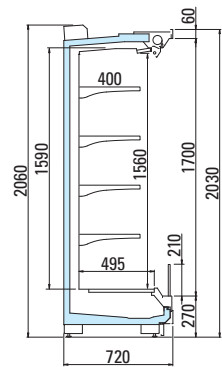


70 H203 GL

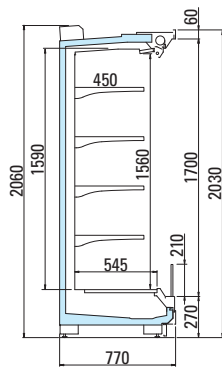


75 H203 GL

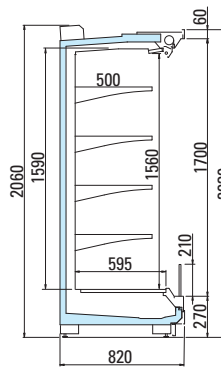


80 H203 GL

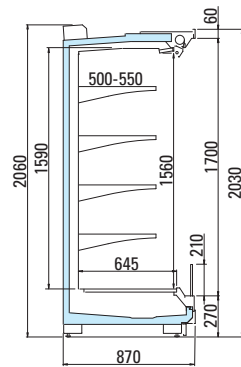


85 H203 GL

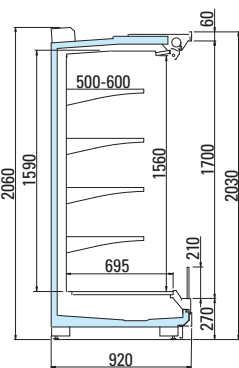


90 H203 GL

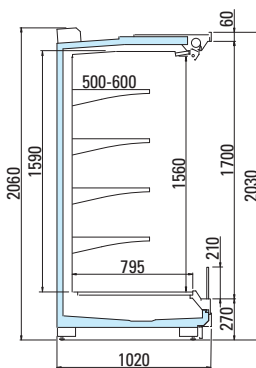


100 H203 GL

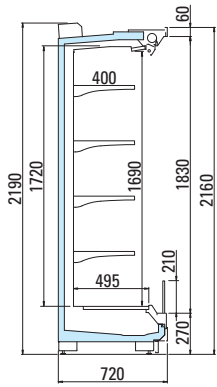


70 H216 GL

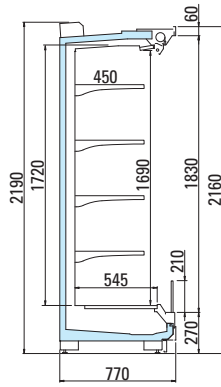


75 H216 GL

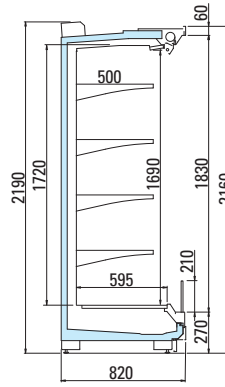


80 H216 GL

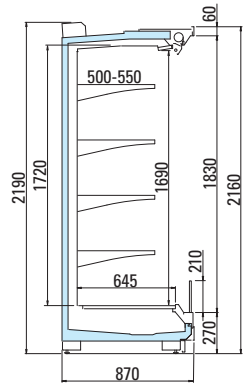

85 H216 GL

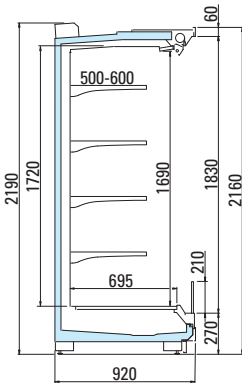

90 H216 GL

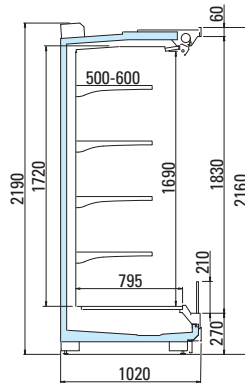


100 H216 GL

PANAMA 3 LX VRT-A-1 TN V TESTATA R GL


Length without side panels	mm	1350	1433		1600		1774		1975		2183	
Height	cm	203	203	216	203	216	203	216	203	216	203	216
Temperature class	3 M1	•	•	•	•	•	•	•	•	•	•	•
	3 M2	•	•	•	•	•	•	•	•	•	•	•
Preservation temperature	0/+2	•	•	•	•	•	•	•	•	•	•	•
	+2/+4	•	•	•	•	•	•	•	•	•	•	•
Horizontal display area*	m ²	Depth	75	2,68	2,86	3,22	3,59	4,02	-	4,47		
			90	-	3,59	4,04	4,51	5,05	5,61			
Energy class**	Depth	75	E	E	E	E	E	E	-	E		
		90	-	E	E	E	E	E	E	E		

*Value referred to illustrated configurations.


**The energy class may vary depending on the product configuration.

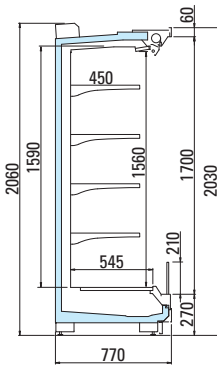


75 H203 GL

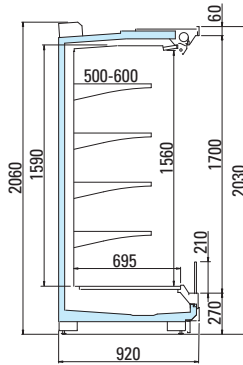

90 H203 GL

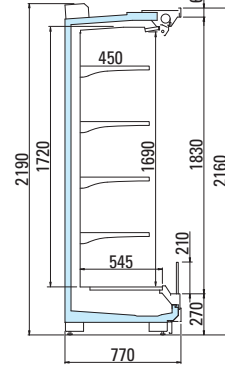

75 H216 GL

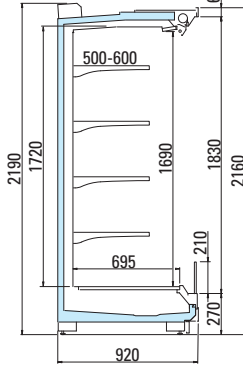


90 H216 GL

PANAMA 3 LX SVTQ-A-1 TN V LINEARE R


Length without side panels	mm	1250		1875		2500		3750			
Height	cm	150	165	150	165	150	165	150	165		
Temperature class	3 M1	•	•	•	•	•	•	•	•		
	3 M2	•	•	•	•	•	•	•	•		
Preservation temperature	0/+2	•	•	•	•	•	•	•	•		
	+2/+4	•	•	•	•	•	•	•	•		
Horizontal display area*	m ²	Depth	65	1,87	-	2,8	-	3,74	-	5,6	
			75	-	2,37	-	3,55	-	4,74	-	7,1
			85	2,68	2,68	4,02	4,02	5,36	5,36	8,04	8,04
Energy class**		Depth	65	A ↑ G E	-	A ↑ G E	-	A ↑ G E	-	A ↑ G E	
			75	-	A ↑ G F	-	A ↑ G F	-	A ↑ G F	-	A ↑ G F
			85	A ↑ G E	A ↑ G F	A ↑ G E	A ↑ G F	A ↑ G E	A ↑ G F	A ↑ G E	A ↑ G F

*Value referred to illustrated configurations.


**The energy class may vary depending on the product configuration.




65 H150



75 H165



85 H150



85 H165